



octopussy 1412 TWIN



120 Kg =

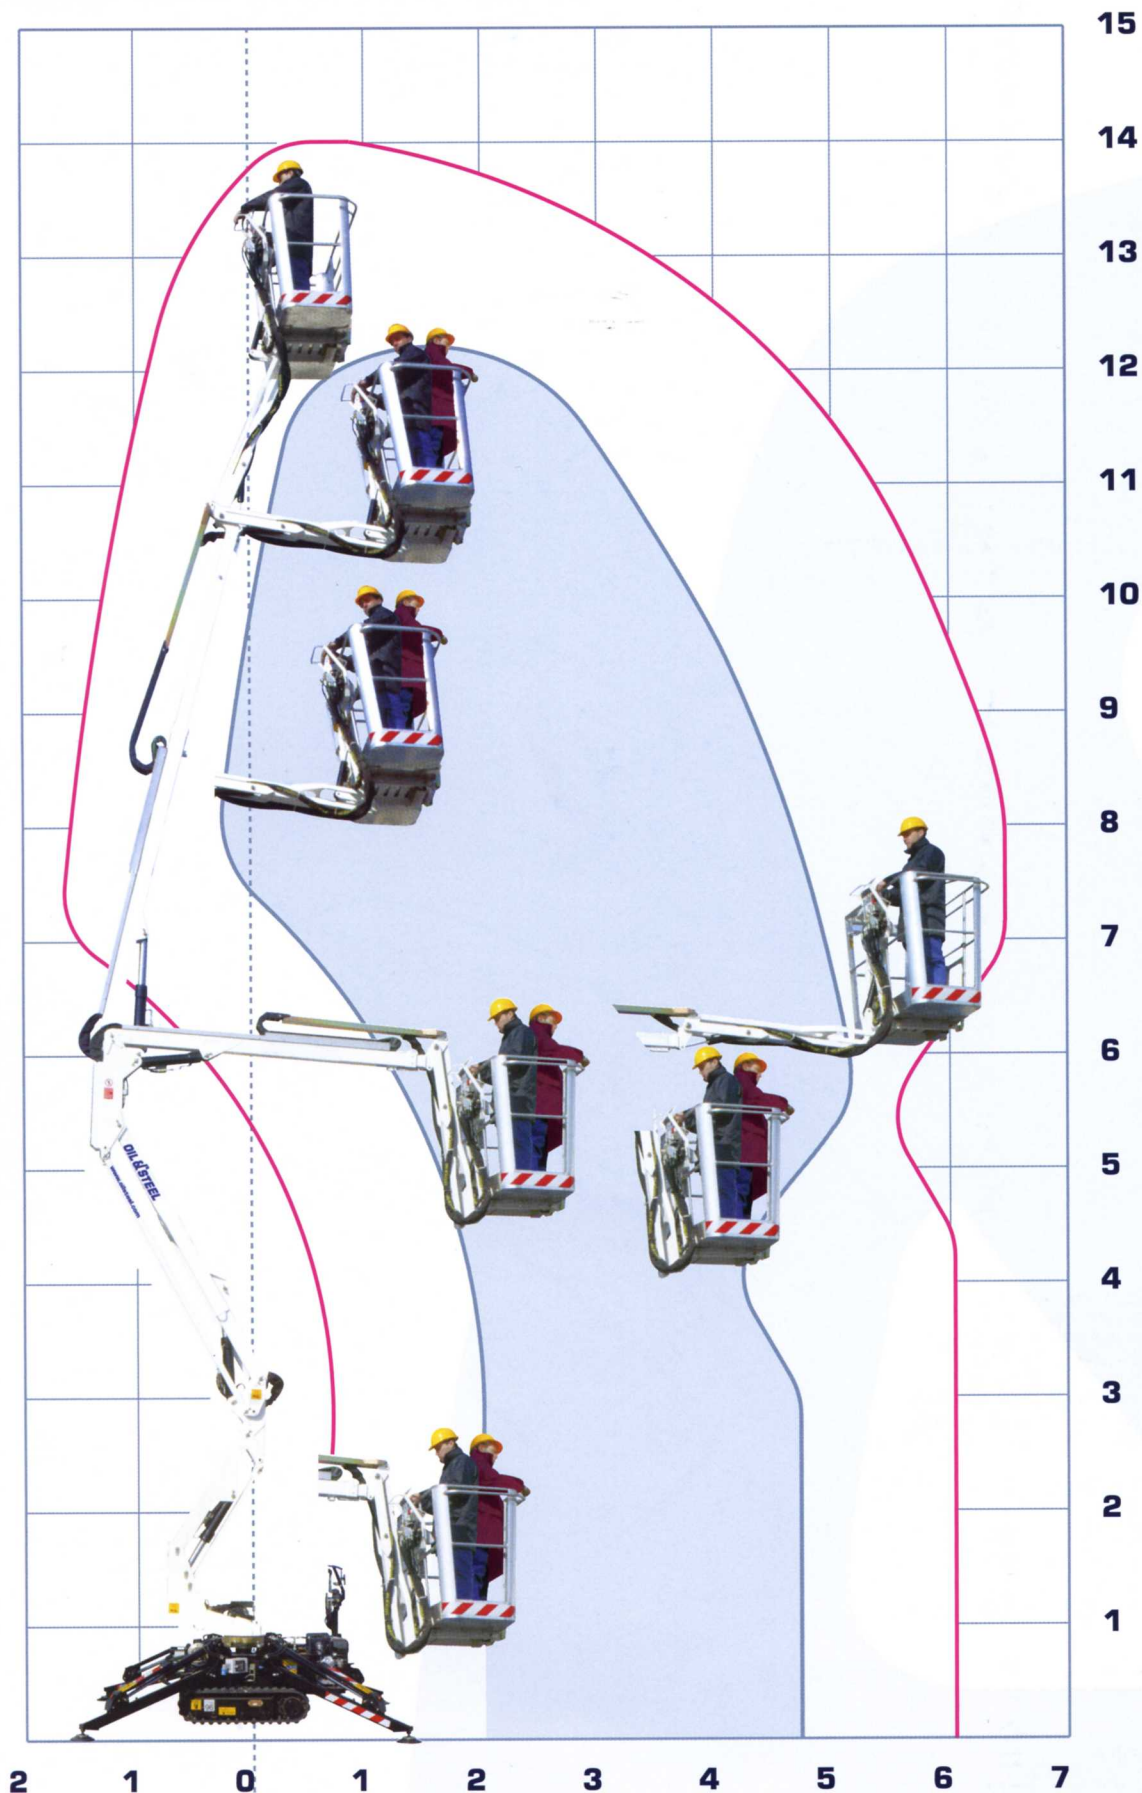

200 Kg =





13,9 m (120 Kg) / 12,3 m (200 Kg)



11,9 m (120 Kg) / 10,3 m (200 Kg)



6,4 m (120 Kg) / 5,7 m (200 Kg)



300°



Asportabile, alluminio, 1400x700xh1100 mm
 Removable, aluminium, 1400x700xh1100 mm
 Démontable, aluminium, 1400x700xh1100 mm
 Alluminio, 1400x700xh1100 mm
 Abnehmbar, alu., 1400x700xh1100 mm
 Aluminium, 1400x700xh1100 mm
 Aluminium, 1400x700xh1100 mm
 СЪЕМНАЯ - 1400x700x1100 мм АЛЮМИНИЕВАЯ)



Idraulici
 Hydraulic
 Hydrauliques
 Hidráulico
 Hydraulisch
 Hydraulisch
 Hydraulisk
 ГИДРАВЛИЧЕСКОЕ



120 Kg - 1 operatore / 200 Kg - 2 operatori
 120 Kg - 1 operator / 200 Kg - 2 operators
 120 Kg - 1 opérateur / 200 Kg - 2 opérateurs
 120 Kg - 1 operario / 200 Kg - 2 operarios
 120 Kg - 1 bediener / 200 Kg - 2 bediener
 120 Kg - 1 personen / 200 Kg - 2 personen
 120 Kg - 1 operatører / 200 Kg - 2 operatører
 120Kg кг - 1 ЧЕЛОВЕК / 200Kg кг - 2 ЧЕЛОВЕКА



1960 mm



4000 mm



780 mm



Ribaltabili a discesa idraulica
 Collapsible, hydraulic descent
 Escamotables à descente hydraulique
 Replegables de bajada hidraulica
 klappbar mit hydraulisch absenken
 hydraulisch utvovwbare stempelpoten
 sammenklappelig, hydraulisk sænkning
 СКЛАДЫВАЮЩИЕСЯ, ГИДРАВЛИЧЕСКОЕ ОПУСКАНИЕ



Honda monocilindrico silenzioso/elettrico 220V
 Single-cylinder noiseless honda/electric 220V
 Honda monocylindrique avec silencieux/electrique 220V
 Honda monocilindrico silenciado/electrico 220V
 geräuschloser einzylindermotor, honda
 geluidsarm honda/electrische 220v
 et-cylindret støjsvag honda/elektrisk 220v
 ОДНОЦИЛИНДРОВЫЙ БЕЗШУМНЫЙ ЭЛЕКТРИЧЕСКИЙ 220В



Cingolata 1,5 km/h
 Tracked 1,5 km/h
 Sue chenilles 1,5 km/h
 Oruga 1,5 km/h
 raupen / 1,5 km/h
 rups / 1,5 km/h
 bæltedrevet / 1,5 km/t
 ГУСЕНИЧНОЕ / 1,5 км/ч



1630 kg

